


56" PS ENGINEERING CALIPER TOOL

SPECIFICATION SHEET

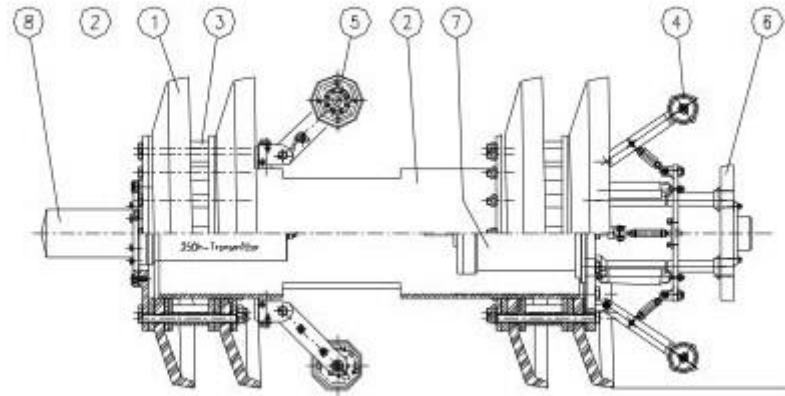

1 – Cup , 2 – Pig Body , 3 – Cup Spacers , 4 – SC Spider , 5 – Odometer , 6 – Spider Protection Support Plate
7 – Recorder , 8 – Pig Locator

DATA SETS

Sensing Fingers with Double Wheels	48
Gyros	1
Odometer Channels	2

OPERATIONAL

Products	All Liquids and Gases
Max. Pressure	120 bar (1740.45 psig)
Temp. Range	-10° to 80° C
Recommended Tool Speed*	0.1 to 3 m/s
Allowable Tool Speed	0.1 to 10 m/s
Minimum Back Pressure	3 bar (44 psig)

DIMENSIONS

Length**	approx. 2600 mm (102.36 in)
Weight	approx. 800 kg (1763.69 lbs)

The below mentioned Features/Indications will be located (longitudinally) and identified the PS Engineering Caliper Tool.

- T-Pieces
- Valves
- Bends
- Girth Welds
- Dents
- Ovality
- Internal Diameter Changes

Tool Attributes

Battery Capacity	700 hrs
Active Range (Max. Distance)	600 km
Odometer Resolution	47 mm
Modules	1

PIPELINE GEOMETRY REQUIREMENTS

Minimum Local Bore	25% of pipe O.D.
Min. Bend Radius	1.5D for 90° Bend
Min. ID in Straight Pipe	1066 mm

Accuracy of Measurement

Accuracy of Distance information $\leq 0.2\text{mm}$ from ref. Girth Weld or 0.1% of total distance

Accuracy of Internal Dia. Changes $\pm 0.2\%$

Accuracy of Defect Measurement $\pm 0.2\%$

Axial Sampling 47 mm

All given percentage values are related to the outer diameter (OD). The above mentioned accuracies depend on acceptable run conditions:

- Constant speed during inspection
- Clean pipe
- Pipebook given to PS Engineering evaluation department

When driving the tool with compressed air, the pipeline must have a back pressure of at least 5 bars / 0,5 MPA (depending on condition of the pipeline)

* At tool speeds above 3 m/s, the girth weld indications become inaccurate due to dynamic overreaction of the sensing fingers. For best results we recommend tool speeds between 0.1 and 1.5 m/s.

** For shorter lengths contact PS Engineering

At tool speeds above 3 m/s, the girth weld indications become inaccurate due to dynamic overreaction of the sensing fingers. For best results we recommend tool speeds between 0.1 and 1.5 m/s.

PS Engineering reserves the right to introduce technical changes and modifications without prior notice.