


# 6" PS ENGINEERING CALIPER TOOL

## SPECIFICATION SHEET

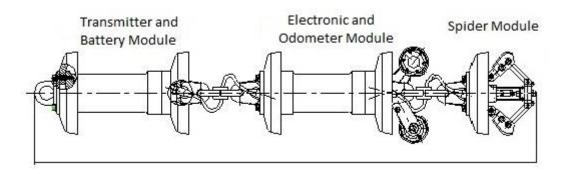

#### **DATA SETS**

Sensing Fingers wiht Double Wheels 12

Gyros 1

Odometer Channels 2

### **OPERATIONAL**

Products All Liquids and Gases

Max. Pressure 120 bar (1740.45 psig)

Temp. Range -10° to 80° C

Recommended Tool Speed\* 0.1 to 3 m/s

Allowable Tool Speed 0.1 to 10 m/s

Minumum Back Pressure 5 bar (72 psig)

## **DIMENSIONS**

Length\*\* approx. 1100 mm (43.30 in)

Weight approx. 27 kg (59.52 lbs)

The below mentioned Featurens/Indications will be loceted (longitudinally) and identified the PS Engineering Caliper Tool.

- T-Pieces
- Valves
- Bends
- Girth Welds
- Dents
- Ovality
- Internal Diameter Changes

| <u>Tool Attributes</u>            |                              |
|-----------------------------------|------------------------------|
| Battery Capacity                  | 700 hrs                      |
| Active Range (Max. Distance)      | 600 km                       |
| Odometer Resolution               | 47 mm                        |
| Modules                           | 3                            |
| PIPELINE GEOMETRY REQUIREMENTS    |                              |
| Minimum Local Bore                | 25% of pipe O.D.             |
| Min. Bend Radius                  | 1.5D for 90° Bend            |
| Min. ID in Straight Pipe          | 126 mm                       |
| Accuracy of Measurement           |                              |
| Accuracy of Distance information  | ≤ 0.2mm from ref. Girth Weld |
|                                   | or 0.1% of total distance    |
| Accuracy of Internal Dia. Changes | +/- 0.2%                     |
| Accuracy of Defect Measurement    | +/- 0.2%                     |
| Axial Sampling                    | 47 mm                        |
|                                   |                              |

Rev. Date: 05.01.2015

All given percentage values are related to the outer diameter (OD). The above mentioned accuracies depend on acceptable run conditions:

- Constant speed during inspection
- Clean pipe
- Pipebook given to PS Engineering evaluation department

When driving the tool with compressed air, the pipeline must have a back pressure of at least 5 bars / 0,5 MPA (depending on condition of the pipeline)

\* At tool speeds above 3 m/s, the girth weld indications become inaccurate due to dynamic overreaction of the sensing fingers. For best results we

recommend tool speeds between 0.1 and 1.5 m/s. \*\* For shorter lengths contact PS Engineering

At tool speeds above 3 m/s, the girth weld indications become inaccurate due to dynamic overreaction of the sensing fingers. For best results we recommend tool speeds between 0.1 and 1.5 m/s.

PS Engineering reserves the right to introduce technical changes and modifications without prior notice.